Modular crane and service lift

Without counterweight, without cable guides, without cable trolley.

PEGA 0410 IL CONTACTLESS

TECHNICAL DATA

CAPACITY		
Payload capacity	900	lb
Passengers	2	
Erection load	900	lb
Speed	0-131	ft/min
Rated lifting height	0-1000	ft
Other lifting height on request		
Maximum tie spacing	as per project	

DIMENSIONS		
Internal width x length	2'-71"x3'-5,3"	
Internal minimum height	7'-4,2"	
Door opening w x h	1'-11,6"x6'-6,7"	
Mast section length	4'-11,4"	

ELECTRICAL DATA		
Power supply	380-460V 3Ph 50/60	Hz
Power supply fuses	16	A
Rated power	5,5	kW
Starting current	13	A
Running current	11	A
Power consumption	8	kVA

WEIGHTS		
Base unit and enclosure	2650	lb
Cage weight	1100	lb
Mast section with 1 rack	143-265	lb

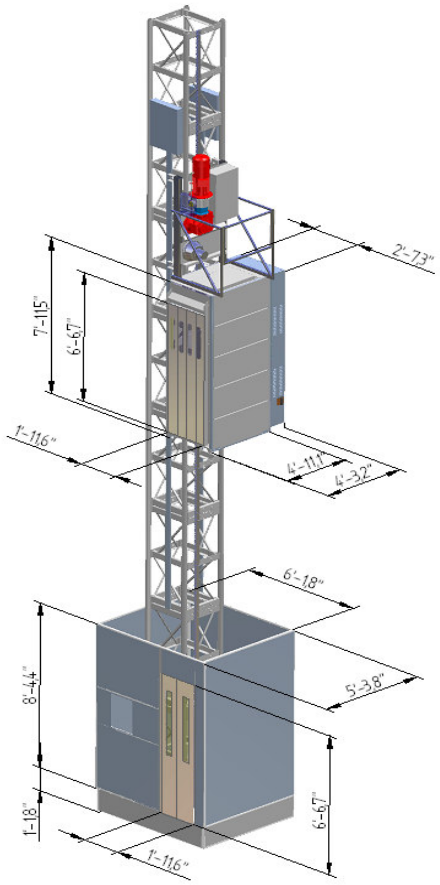

CONTROL SYSTEM
Push button control/ Key pad control/ Joystick
Other control systems on request

Mast types



A P Z

General:
All lifts equipped with frequency controlled drives and programmable control systems variety of opional equipment.
Different masts and tie- systems to meet all kind of application demands.
Doors installations in different positions and combinations.
The above specification may vary based on country and region of delivery.

CONSULT - RENT - SALE - SERVICE

PEGA HOIST Ltd.
Fablovka 547
CZ - 533 52 Pardubice
Tel. : +420 466 536 348, 466 536 350
Fax : +420 466 536 351
E-mail : info@pega-hoist.com
www.pega-hoist.com

Local representative

The technical data above are for information only. The manufacturer reserves the right to change the parameters subject to continuous development and improvements.