



Rack and pinion passenger/goods hoist

Without counterweight - single or twin operation (1 or 2 cages)

PEGA 2832 TD VFC

TECHNICAL DATA

CAPACITY PER CAGE

| | |
|----------------------|--------------|
| Payload capacity | 6000 lb |
| Passengers | 24 |
| Erection load | 2200 lb |
| Speed | 0-328 ft/min |
| Rated lifting height | 0-1380 ft |
| Maximum tie spacing | 34 ft |

DIMENSIONS PER CAGE

| | |
|-------------------------|-----------------|
| Internal width x length | 4'-11,1"x10'-6" |
| Internal minimum height | 8'-2" |
| Door opening w x h | 4'-8,3"x6'-6,7" |
| Mast section length | 4'-11,4" |

ELECTRICAL DATA PER CAGE

| | |
|----------------------------|-----------------------|
| Power supply | 380-460V 3Ph 50/60 Hz |
| Power supply fuses | 63-125 A |
| Rated power | 37-75 kW |
| Starting current | 58-114 A |
| Running current (40% duty) | 45-88 A |
| Power consumption | 38-70 kVA |

WEIGHTS PER CAGE

| | |
|---------------------------|------------|
| Base unit and enclosure | 7500 lb |
| Cage weight | 5300 lb |
| Mast section with 2 racks | 386-474 lb |

CONTROL SYSTEM

Joystick/ Push button/ Key pad control

Preprogrammable floor stops

Other control systems on request

Generall:

All lifts equipped with frequency controlled drives

and programmable control systems


Cable basket or cable trolley operation

Variety of opional equipment

Different masts and tie- systems to meet all kind of application demands

Doors installations in different positions and combinations

The above specification may vary based on country and region of delivery.

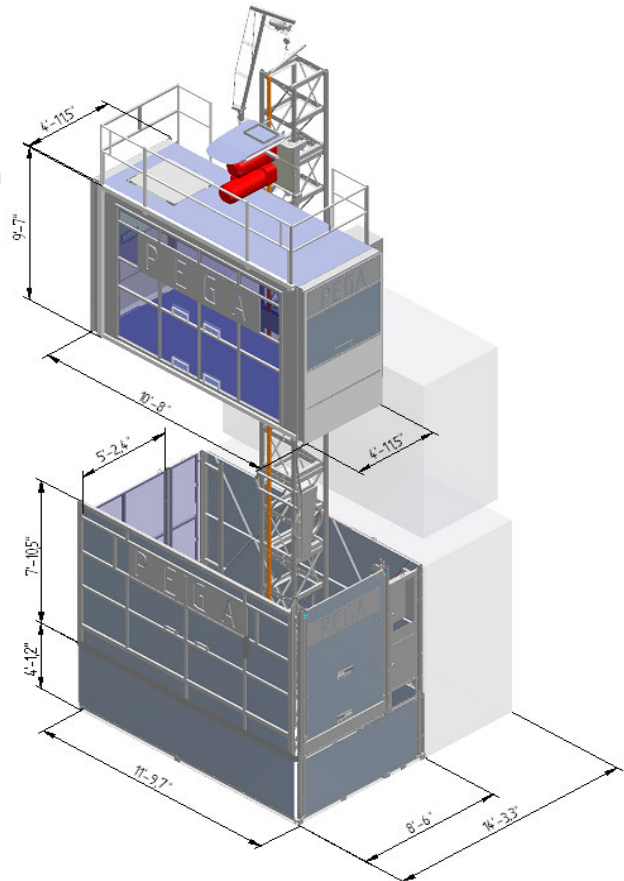

CONSULT - RENT - SALE - SERVICE

PEGA HOIST Ltd.

Fablovka 547

CZ - 533 52 Pardubice

Tel. : +420 466 536 348, 466 536 350

Fax : +420 466 536 351

E-mail : info@pega-hoist.com

www.pega-hoist.com

Local representative

The technical data above are for information only. The manufacturer reserves the right to change the parameters subject to continuous development and improvements.