



Rack and pinion passenger/goods hoist

Without counterweight - single or twin operation (1 or 2 cages)

PEGA 3240 TD VFC

TECHNICAL DATA

CAPACITY PER CAGE

Payload capacity	7000 lb
Passengers	30
Erection load	2200 lb
Speed	0-328 ft/min
Rated lifting height	0-1380 ft
Maximum tie spacing	34 ft

DIMENSIONS PER CAGE

Internal width x length	4'-11,1"x13'-1,5"
Internal minimum height	8'-2"
Door opening w x h	4'-8,3"x6'-6,7"
Mast section length	4'-11,4"

ELECTRICAL DATA PER CAGE

Power supply	380-460V 3Ph 50/60 Hz
Power supply fuses	250 A
Rated power	132 kW
Starting current	244 A
Running current (40% duty)	192 A
Power consumption	139 kVA

WEIGHTS PER CAGE

Base unit and enclosure	10800 lb
Cage weight	7500 lb
Mast section HD with 2 racks	441 lb
Mast section SHD with 2 racks	474 lb

CONTROL SYSTEM

Joystick/ Push button/ Key pad control
Preprogrammable floor stops
Other control systems on request


Generall:

All lifts equipped with frequency controlled drives
and programmable control systems
Cable basket or cable trolley operation
Variety of opional equipment

Different masts and tie- systems to meet all kind of application demands

Doors installations in different positions and combinations

The above specification may vary based on country and region of delivery.

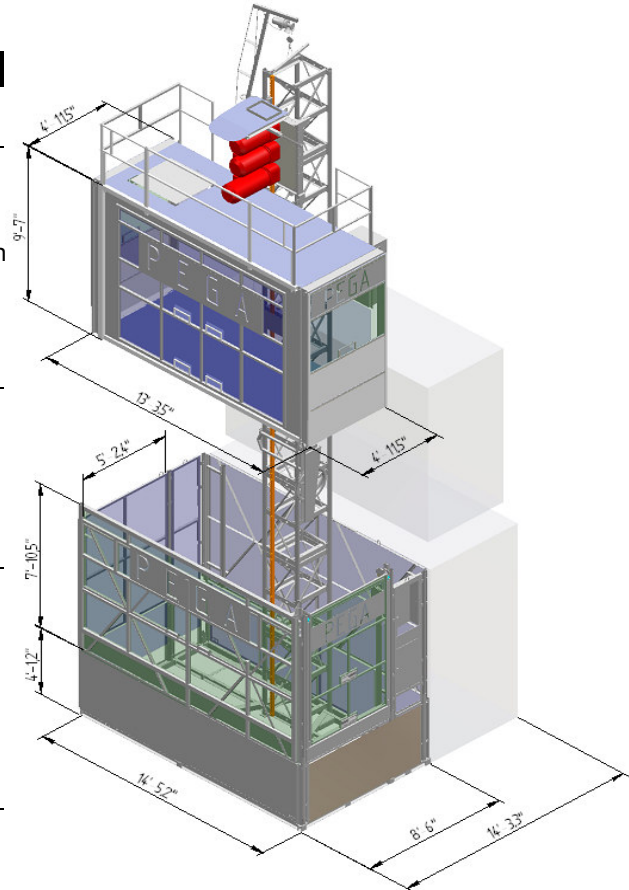

CONSULT - RENT - SALE - SERVICE

PEGA HOIST Ltd.

Fablovka 547
CZ - 533 52 Pardubice
Tel. : +420 466 536 348, 466 536 350
Fax : +420 466 536 351
E-mail : info@pega-hoist.com
www.pega-hoist.com

Local representative

The technical data above are for information only. The manufacturer reserves the right to change the parameters subject to continuous development and improvements.