



Modular crane and service lift

Without counterweight, without cable guides, without cable trolley.

PEGA IL CONTACTLESS

TECHNICAL DATA

CAPACITY

Payload capacity	660-3300 lb
Passengers	2-18
Erection load	900 lb
Speed	0-131 ft/min
Rated lifting height	0-1000 ft
Other lifting height on request	
Maximum tie spacing	as per project

DIMENSIONS

Internal width x length	depend of project
Internal minimum height	7'-4,2"
Door opening w x h	1'-11,6"x6'-6,7"
Mast section length	4'-11,4"

ELECTRICAL DATA

Power supply	380-460V 3Ph 50/60 Hz
Power supply fuses	16-32 A
Rated power	5-22 kW
Starting current	9-37 A
Running current	7-28 A
Power consumption	6-25 kVA

WEIGHTS

Base unit and enclosure	2650-5500 lb
Cage weight	1100-2200 lb
Mast section with 1 rack	143-265 lb

CONTROL SYSTEM

Push button control/ Key pad control/ Joystick
Other control systems on request


General:

All lifts equipped with frequency controlled drives and programmable control systems variety of optional equipment.


Different masts and tie- systems to meet all kind of application demands.

Doors installations in different positions and combinations.


The above specification may vary based on country and region of delivery.

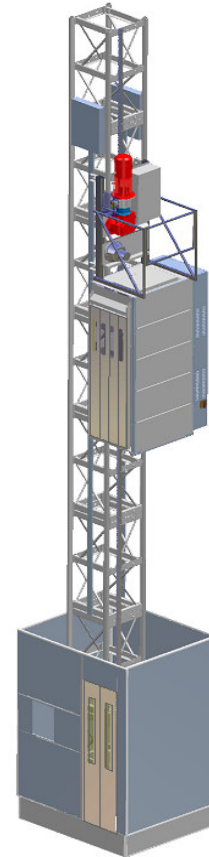

Mast types



A



P



Z

CONSULT - RENT - SALE - SERVICE

PEGA HOIST Ltd.

Fablovka 547
CZ - 533 52 Pardubice
Tel. : +420 466 536 348, 466 536 350
Fax : +420 466 536 351
E-mail : info@pega-hoist.com
www.pega-hoist.com

Local representative

The technical data above are for information only. The manufacturer reserves the right to change the parameters subject to continuous development and improvements.