



## Rack and pinion passenger/goods hoist

Without counterweight - single or twin operation (1 or 2 cages)

# PEGA1532 TD VFC LS

### TECHNICAL DATA

#### CAPACITY PER CAGE

Payload capacity	1500 kg
Passengers	18
Erection load	1000 kg
Speed	0-40 m/min
Rated lifting height	0-200 m
Maximum tie spacing	15 m

#### DIMENSIONS PER CAGE

Internal width x length	1,5 x 3,2 m
Internal minimum height	2,16 m
Door opening w x h	1,5 x 2,0 m
Mast section length	1,508 m

#### ELECTRICAL DATA PER CAGE

Power supply	380-460 V 3Ph 50/60 Hz
Power supply fuses	50 A
Rated power	30 kW
Starting current	48-59 A
Running current (40% duty)	37-45 A
Power consumption	30 kVA

#### WEIGHTS PER CAGE

Base unit and enclosure	2650 kg
Cage weight	2000 kg
Mast section with 2 racks	150-215 kg

#### CONTROL SYSTEM

Joystick/ Push button/ Key pad control

Preprogrammable floor stops

Other control systems on request

Generall:

All lifts equipped with frequency controlled drives and programmable control systems


Cable basket or cable trolley operation

Variety of opional equipment

Different masts and tie- systems to meet all kind of application demands

Doors installations in different positions and combinations

The above specification may vary based on country and region of delivery.

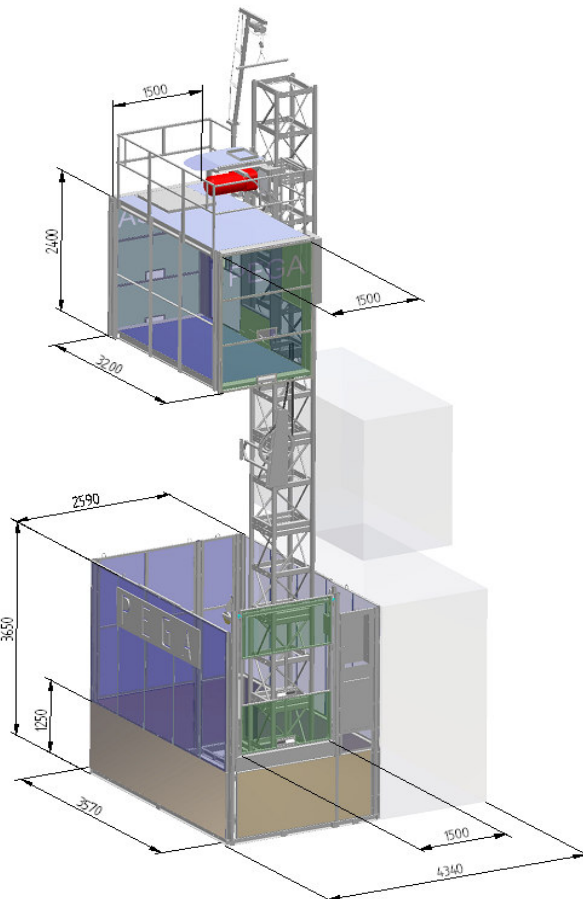

## CONSULT - RENT - SALE - SERVICE

#### PEGA HOIST Ltd.

Fablovka 547  
CZ - 533 52 Pardubice  
Tel. : +420 466 536 348, 466 536 350  
Fax : +420 466 536 351  
E-mail : info@pega-hoist.com  
www.pega-hoist.com

Local representative

The technical data above are for information only. The manufacturer reserves the right to change the parameters subject to continuous development and improvements.