Rack and pinion passenger/goods hoist

Without counterweight - single or twin operation (1 or 2 cages)

PEGA 2737 TD VFC

TECHNICAL DATA

CAPACITY PER CAGE		
Payload capacity	2700	kg
Passengers	28	
Erection load	1000	kg
Speed	0-100	m/min
Rated lifting height	0-420	m
Maximum tie spacing	12	m

DIMENSIONS PER CAGE		
Internal width x length	1,5 x 3,7	m
Internal minimum height	2,49	m
Door opening w x h	1,43 x 2,0	m
Mast section length	1,508	m

ELECTRICAL DATA PER CAGE		
Power supply	380-460V 3Ph 50/60	Hz
Power supply fuses	80-160	A
Rated power	45-75	kW
Starting current	98-163	A
Running current (40% duty)	76-126	A
Power consumption	47-77	kVA

WEIGHTS PER CAGE		
Base unit and enclosure	4000	kg
Cage weight	2900	kg
Mast section with 2 racks	175-215	kg

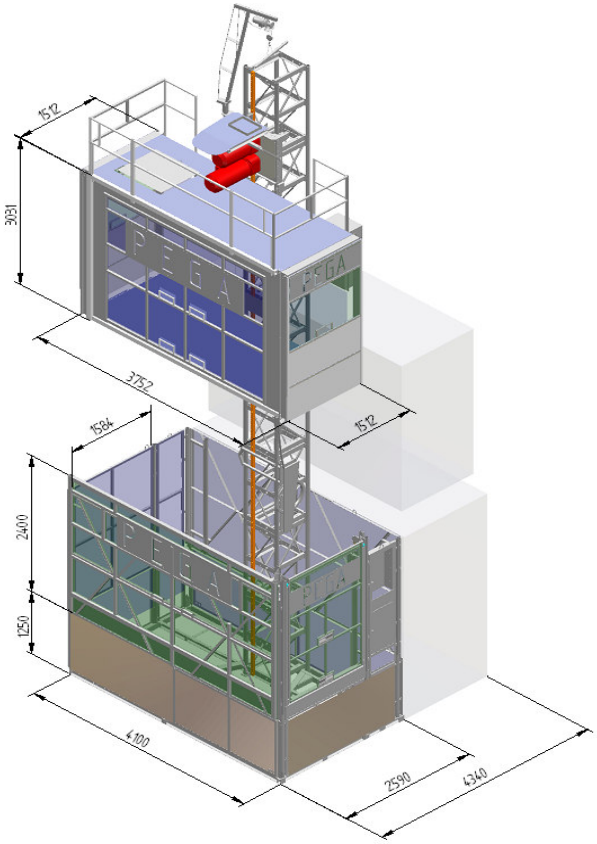

CONTROL SYSTEM

Joystick/ Push button/ Key pad control
Preprogrammable floor stops
Other control systems on request
Generall:
All lifts equipped with frequency controlled drives
and programmable control systems
Cable basket or cable trolley operation
Variety of opional equipment
Different masts and tie- systems to meet all kind of application demands
Doors installations in different positions and combinations
The above specification may vary based on country and region of delivery.

CONSULT - RENT - SALE - SERVICE

PEGA HOIST Ltd.
Fablovka 547
CZ - 533 52 Pardubice
Tel. : +420 466 536 348, 466 536 350
Fax : +420 466 536 351
E-mail : info@pega-hoist.com
www.pega-hoist.com

Local representative

The technical data above are for information only. The manufacturer reserves the right to change the parameters subject to continuous development and improvements.