



## Modular crane and service lift

Without counterweight, without cable guides, without cable trolley.

# PEGA IL CONTACTLESS

### TECHNICAL DATA

#### CAPACITY

Payload capacity	300-1500 kg
Passengers	2-18
Erection load	400 kg
Speed	0-40 m/min
Rated lifting height	0-300 m
Other lifting height on request	
Maximum tie spacing	as per project

#### DIMENSIONS

Internal width x length	depend on project
Internal minimum height	2,24 m
Door opening w x h	0,6x2,0 m
Mast section length	1,508 m

#### ELECTRICAL DATA

Power supply	380-460 V 3Ph 50/60 Hz
Power supply fuses	16-50 A
Rated power	5-22 kW
Starting current	10-42 A
Running current	8-32 A
Power consumption	6-25 kVA

#### WEIGHTS

Base unit and enclosure	1200-2500 kg
Cage weight	500-1000 kg
Mast section with 1 rack	65-125 kg

#### CONTROL SYSTEM

Push button control /Key pad control / Joystick  
Other control systems on request


#### General:

All lifts equipped with frequency controlled drives and programmable control systems variety of opional equipment.

Different masts and tie- systems to meet all kind of application demands.

Doors installations in different positions and combinations.


The above specification may vary based on country and region of delivery.

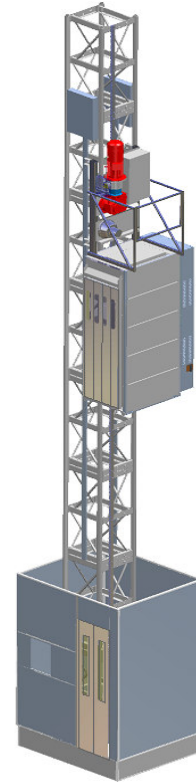


#### Mast types



A



P



Z

## CONSULT - RENT - SALE - SERVICE

#### PEGA HOIST Ltd.

Fablovka 547  
CZ - 533 52 Pardubice  
Tel. : +420 466 536 348, 466 536 350  
Fax : +420 466 536 351  
E-mail : info@pega-hoist.com  
www.pega-hoist.com

Local representative

The technical data above are for information only. The manufacturer reserves the right to change the parameters subject to continuous development and improvements.