



## Modular material hoist with extendible platform

### Pega 15Me/VFC

#### TECHNICAL DATA

##### CAPACITY

Payload capacity	1000-1500 kg
Erection load	1000 kg
Speed	30 m/min
Maximum lifting height	100 m
Maximum tie spacing	15 m

##### DIMENSIONS


Internal width	1,5 m
Internal length	2; 3; 3,2; 3,7; 4 m
Internal height	1,1 m
Mast section length	1,508 m

##### ELECTRICAL DATA

Power supply	380-460V 3Ph 50Hz
Drive unit PEGA-SEW Eurodrive	
Power cable guiding system:	Collecting basket or cable trolley

##### WEIGHTS

Base unit and enclosure	2000-2600 kg
Cage	1100-1600 kg
Mast section with 1 rack	123 kg
Mast section with 2 rack	146 kg

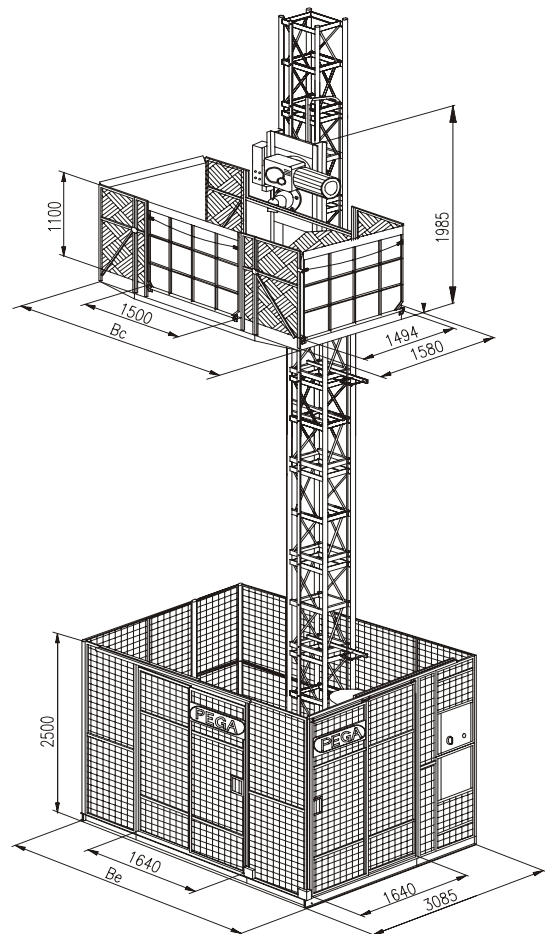

length of platform Bc	load capacity	length of enclosure Be	Length of Extension parts
2,00 m	1500 kg	2470 mm	*****
3,00 m	1250 kg	3470 mm	2 x 500mm
3,20 m	1200 kg	3670 mm	2 x 600mm
3,70 m	1100 kg	4170 mm	2 x 850mm
4,00 m	1000 kg	4470 mm	2 x 1000mm

Standard:

All lifts equipped with frequency controlled drives

Variety of optional equipment

Different masts and tie- systems to meet all kind of application demands

Doors installations in different positions and combinations

## CONSULT - RENT - SALE - SERVICE

#### PEGA HOIST Ltd.

Na Skrivanku 209  
215 62 Dublovice  
Czech Republic  
Tel. : +420 318 821 572,318 521 592  
Fax : +420 318 875 620  
E-mail : info@pega-hoist.com

#### PEGA HOIST Ltd.

Fablovka 547  
533 52 Pardubice  
Czech Republic  
Tel.: +420 466 536 348,349,350  
Fax: +420 466 536 351  
E-mail : info@pega-hoist.com

Picture is illustrative only and do not necessarily show the configuration on the market at a give point of time. Products must be used in conformity with safe practice and applicable statues regulations, codes and ordinances. Specifications of products and equipment shown herein are subject to change without notice.